



# MSR1000 Wireless Mesh Router

## Hardware Installation Flyer

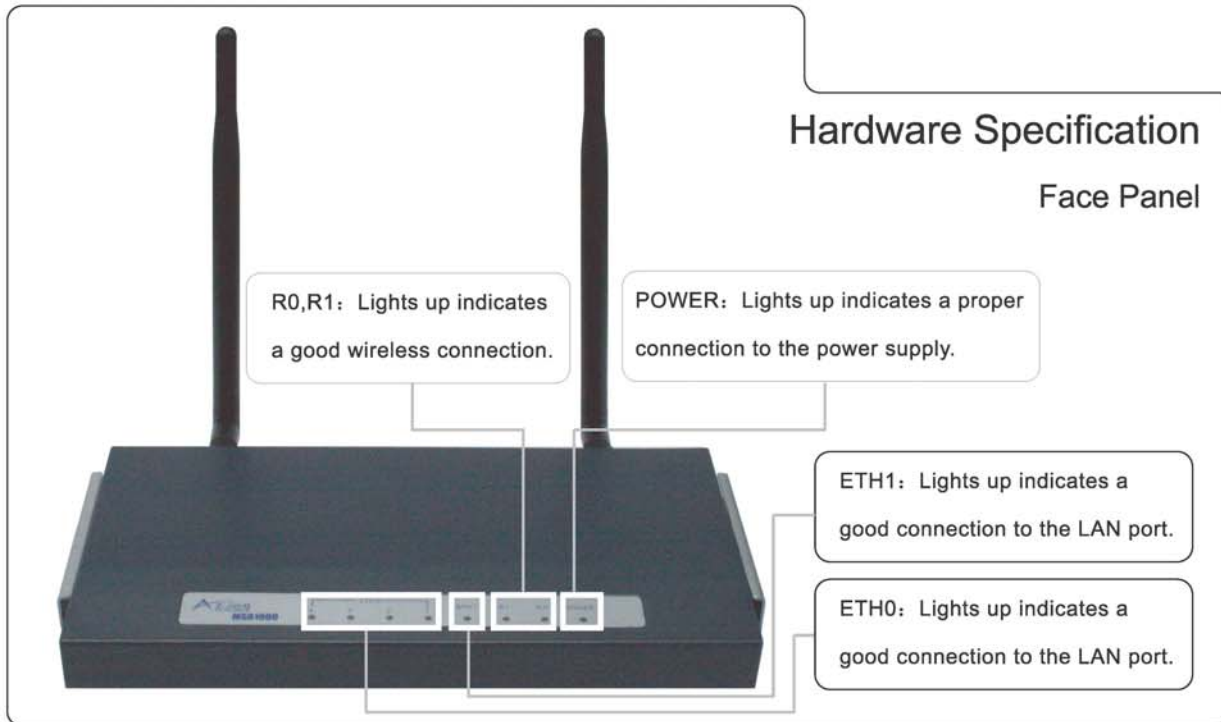

www.azaleanet.com

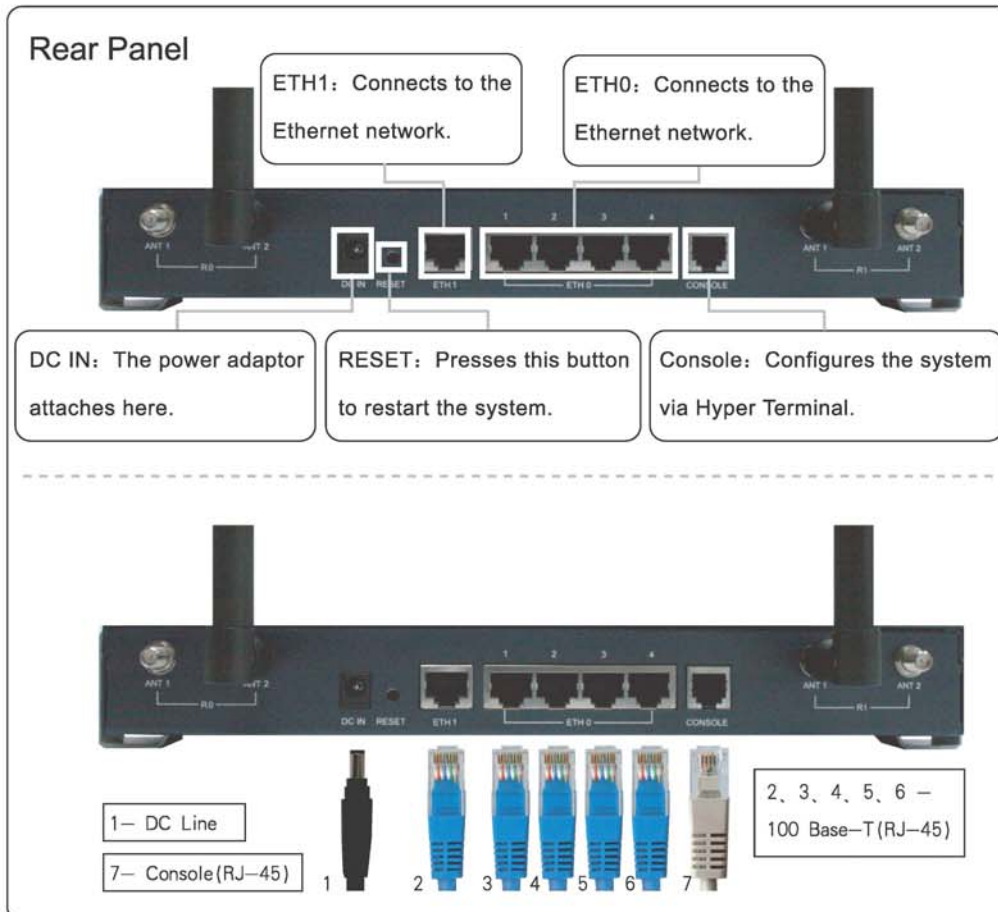

1. Connect the DC power adapter to the power connector socket on the rear panel. The Power LED should be on to indicate a proper connection.
2. Connect an Ethernet cable to the ETH1 port on the rear panel. Connect the other end of the Ethernet cable to a switch/hub. The LED of this WAN port should be on to indicate a proper connection.
3. Connect an Ethernet cable to one of ETH0 ports on the rear panel. Connect the other end of the Ethernet cable to a switch/hub, pc or AP. The LED of ETH0 should be on to indicate a proper connection.

www.azaleanet.com